

202 series


rf inductors

PRODUCT DESCRIPTION

West Coast Magnetics' high Q RF inductors are designed for resonant circuit applications requiring exceptionally high Q's and tight tolerances on inductance specifications. They are mounted in a surface mount package which assures mechanical stability and excellent lead coplanarity. The package is suitable for automatic pick and place equipment.

FEATURES - BENEFITS

Exceptionally high Q values at RF frequencies –™ Standard inductance tolerance +/-5% – Tighter tolerances available on request – Application specific designs also available including different inductance values and Q specifications adjusted to frequency requirements

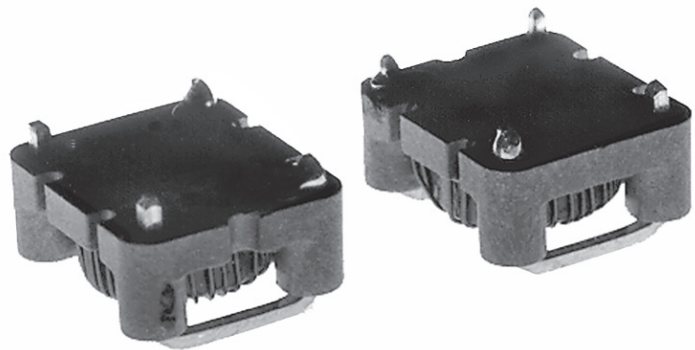


Product Code	Nominal Inductance (μ H)	Q min at	Frequency (MHz)	Q min at	Frequency (MHz)	Q min at	Frequency (MHz)	Nominal DCR ($m\Omega$)	Self Resonant Frequency (MHz) ^o
202-01	0.039	90	70	100	100	100	150	18	550
202-02	0.047	90	70	100	100	100	150	20	530
202-03	0.056	90	70	100	100	100	150	22	510
202-04	0.068	90	70	100	100	100	125	24	490
202-05	0.082	90	70	100	100	100	125	28	470
202-06	0.100	90	70	100	100	100	125	31	440
202-07	0.120	90	70	100	100	100	125	35	400
202-08	0.150	95	25	110	50	105	70	28	330
202-09	0.180	100	25	110	50	105	70	31	310
202-10	0.200	95	20	110	30	105	50	35	280
202-11	0.270	105	20	115	30	110	50	38	230
202-12	0.330	110	20	120	30	110	50	41	220
202-13	0.390	125	10	165	20	155	30	32	200
202-14	0.470	125	10	170	20	155	30	35	180

16–30, continued next page →


...continued from previous

Product Code	Nominal Inductance (μH)	Q min at	Frequency (MHz)	Q min at	Frequency (MHz)	Q min at	Frequency (MHz)	Nominal DCR ($\text{m}\Omega$)	Self Resonant Frequency (MHz) ^o
202-15	0.560	125	10	175	20	155	30	38	170
202-16	0.680	140	10	180	20	160	30	41	150
202-17	0.820	150	10	180	20	160	30	71	140
202-18	1.000	160	10	185	20	160	30	78	120
202-19	1.200	165	10	190	20	160	30	82	110
202-20	1.500	150	7	150	10	140	15	85	100
202-21	1.800	150	7	150	10	135	15	90	90
202-22	2.200	150	7	150	10	135	15	158	75
202-23	2.700	150	7	150	10	135	15	181	65
202-24	3.300	135	4	155	7	150	10	200	60
202-25	3.900	135	4	155	7	150	10	340	55
202-26	4.700	135	4	155	7	145	10	380	50
202-27	5.600	135	4	145	7	145	10	410	45
202-28	6.800	135	4	140	7	140	10	700	43
202-29	8.200	135	4	140	7	135	10	805	38
202-30	10.000	135	4	140	7	135	10	850	35


Dimensions: $\frac{\text{inches}}{\text{mm}}$

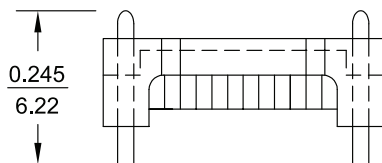


202
Side View



202
Side View

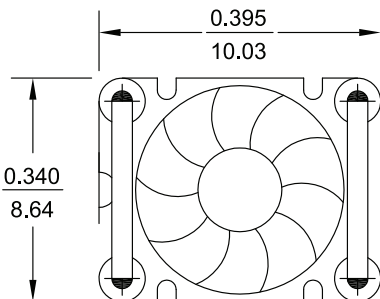

202
Bottom View

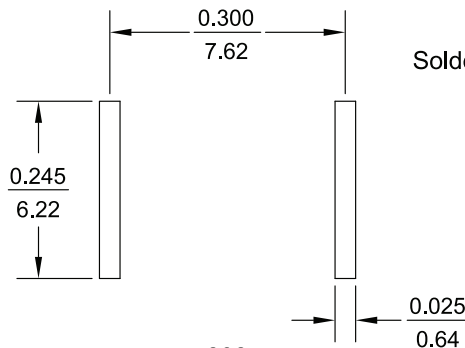

202
Footprint

Moulding: LCP (Grey)

Rating: UL94-VO

2 Terminals: Brass Alloy or Phos. Bronze 09/10 Tin Plated

Solderability: Per MIL-STD-202 Method 208